


Packet Tracer – Configuring Dynamic NAT

Topology

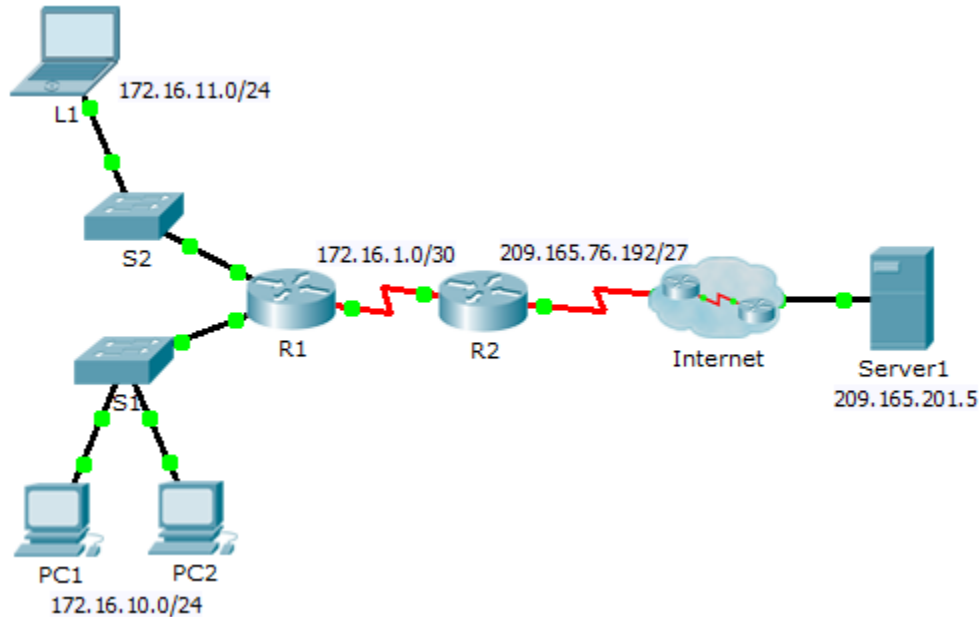

Objectives

Part 1: Configure Dynamic NAT

Part 2: Verify NAT Implementation

Part 1: Configure Dynamic NAT

Step 1: Configure traffic that will be permitted.

On R2, configure one statement for ACL 1 to permit any address belonging to 172.16.0.0/16.

Step 2: Configure a pool of address for NAT.

Configure R2 with a NAT pool that uses all four addresses in the 209.165.76.196/30 address space.

Notice in the topology there are 3 network ranges that would be translated based on the ACL created. What will happen if more than 2 devices attempt to access the Internet?

Step 3: Associate ACL1 with the NAT pool.

Step 4: Configure the NAT interfaces.

Configure R2 interfaces with the appropriate inside and outside NAT commands.

Part 2: Verify NAT Implementation

Step 1: Access services across the Internet.

From the web browser of **L1**, **PC1**, or **PC2**, access the web page for **Server1**.

Step 2: View NAT translations.

View the NAT translations on **R2**.

```
R2# show ip nat translations
```